

CARBON STEEL PIPES

Carbon steel pipes can be suitable for several uses, they are particularly recommended when pipe laying or soil conditions require a product with high mechanical strength. They are available without coating or waterborne base painted. Connections are welding ends with or without collars or with M/F threaded couplings.






CARBON STEEL PIPES RANGE

OUTSIDE DIAMETER (mm)	WALL THICKNESS (mm)											
	3,6	4,0	4,5	5,0	5,6	5,9	6,3	7,1	8,0	8,8	9,5	10,0
	THEORETICAL WEIGHT Kg/mt											
139,7	12,2	13,5	14,9	16,6	18,5	19,4	20,8	23,3	25,9	28,3	30,5	32,0
168,3	14,7	16,3	18,1	20,1	22,4	23,6	25,3	28,3	31,5	34,5	37,2	39,0
177,8	15,7	17,4	19,2	21,3	23,7	25,0	26,7	30,0	33,4	36,5	39,4	41,4
193,7	17,1	18,9	20,9	23,3	26,0	27,3	29,2	32,8	36,5	40,0	43,1	45,3
219,1	19,3	21,4	23,7	26,4	29,4	31,0	33,2	37,2	41,5	45,4	49,1	51,6
244,5		24,0	27,0	29,5	33,0	34,7	37,1	41,7	46,5	50,9	55,0	57,8
273,0		26,7	29,7	33,0	36,8	38,8	41,6	46,7	52,1	57,1	61,7	64,8
323,9		31,8	35,3	39,3	43,9	46,2	49,5	55,6	62,1	68,1	73,6	77,4
355,6				43,2	48,2	50,8	54,5	61,2	68,3	74,9	81,0	85,2
406,4				49,5	55,1	58,2	62,4	70,1	78,3	85,9	92,9	97,8
457,2				55,8	62,1	65,8	70,3	79,0	88,2	96,9	105,0	110,0
508,0				69,1	69,4	73,0	78,2	87,9	98,2	108,0	117,0	123,0
609,6							93,7	106,0	118,0	130,0	141,0	148,0

SPECIFICATIONS OF PIPES WITH M/F THREADED COUPLINGS

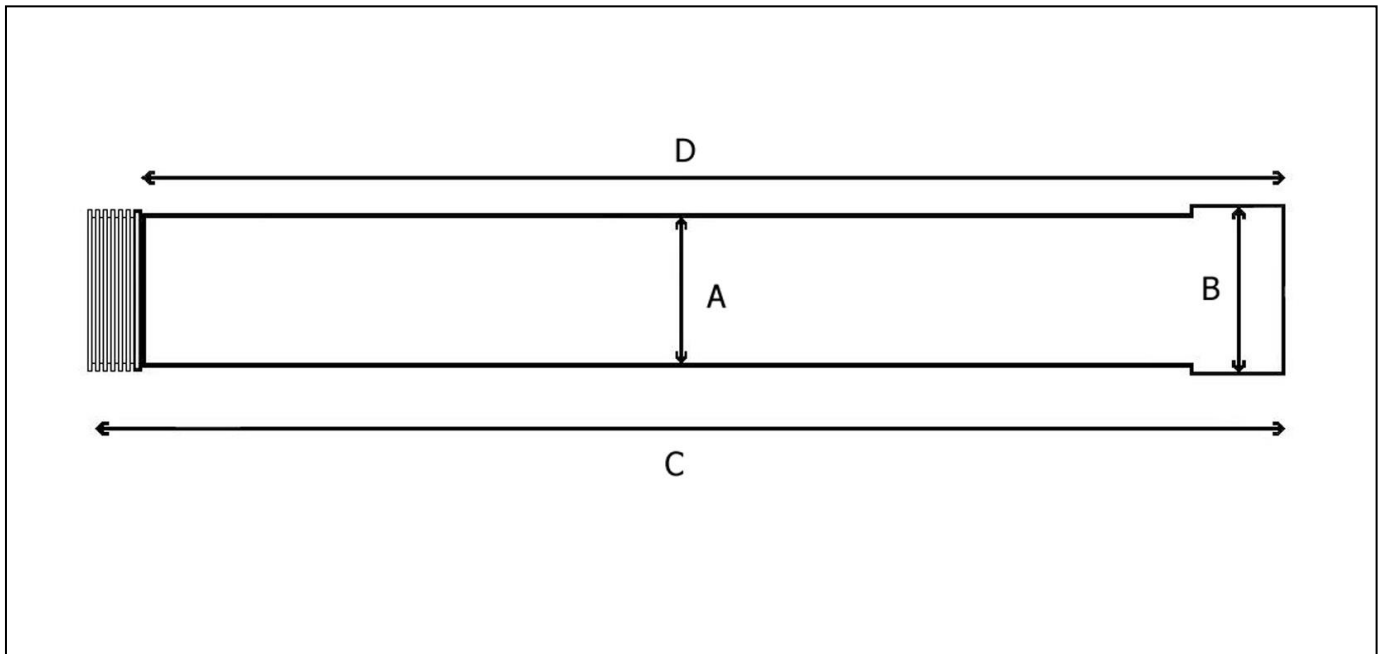

A OUTSIDE DIAMETER (mm)	B FEMALE COUPLING OVERALL DIMENSIONS (mm)	C PIPE TOTAL LENGTH (mm)	D USABLE LENGTH (mm)
139,7	155	6.200	6.150
168,3	180	6.200	6.150
177,8	195	6.200	6.150
193,7	205	6.200	6.150
219,1	230	6.200	6.150
244,5	267	6.200	6.150
273,0	287	6.200	6.150
323,9	340	6.200	6.150
355,6	367	6.200	6.150